
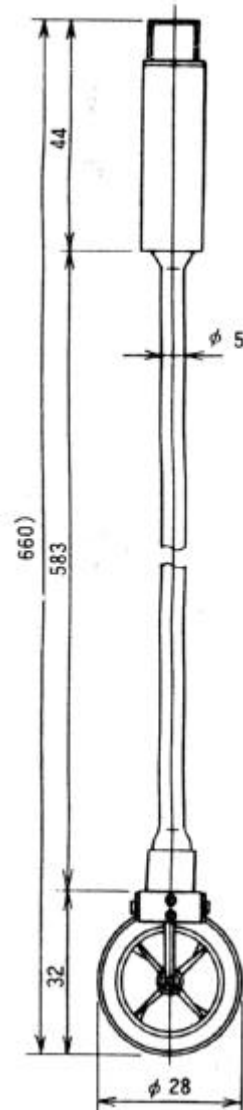


PROPELLER TYPE CURRENT METER

- Easy to carry
- Simple measurement of average flow rate
- Most suitable for measurement of shallow river, waterway, etc.

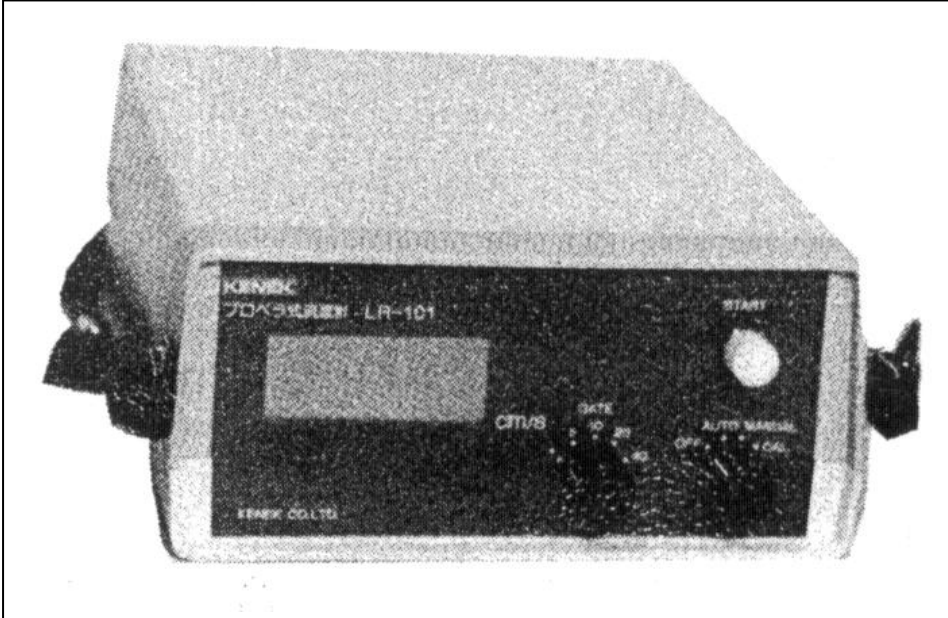

Main Unit	LR-101
Measuring Range	Direct reading current speed 3~200 cm
Range Selector	AUTO/MANUAL
Average Time	1, 5, 10, 20, 40 sec.(5 ranges switching)
Flow Rate Display	Direct reading current speed LCD 4 digit 000.0cm/sec.
Analog Output	0 ~ ±400cm/s ϕ ±2V/FS
Power Source	Dry Cell or Nicd Battery(4 LR6)
Operating Time	Full charged/new battery 20hrs continuously
Dimensions	143W x 68H x 185D mm
Accessories	Battery, Storage Case, Manual
Detector	LRT-200-20
Measuring Range	3 ~ 200 cm/sec.
Dimensions	Refer Fig.
Connecting Cable	5 Meter
Extension Rod	Option
Mounting Clamp	1 pc
Calibration Chart	1 copy